




**NATIONAL
VENTILATION**



FXV DUCTING

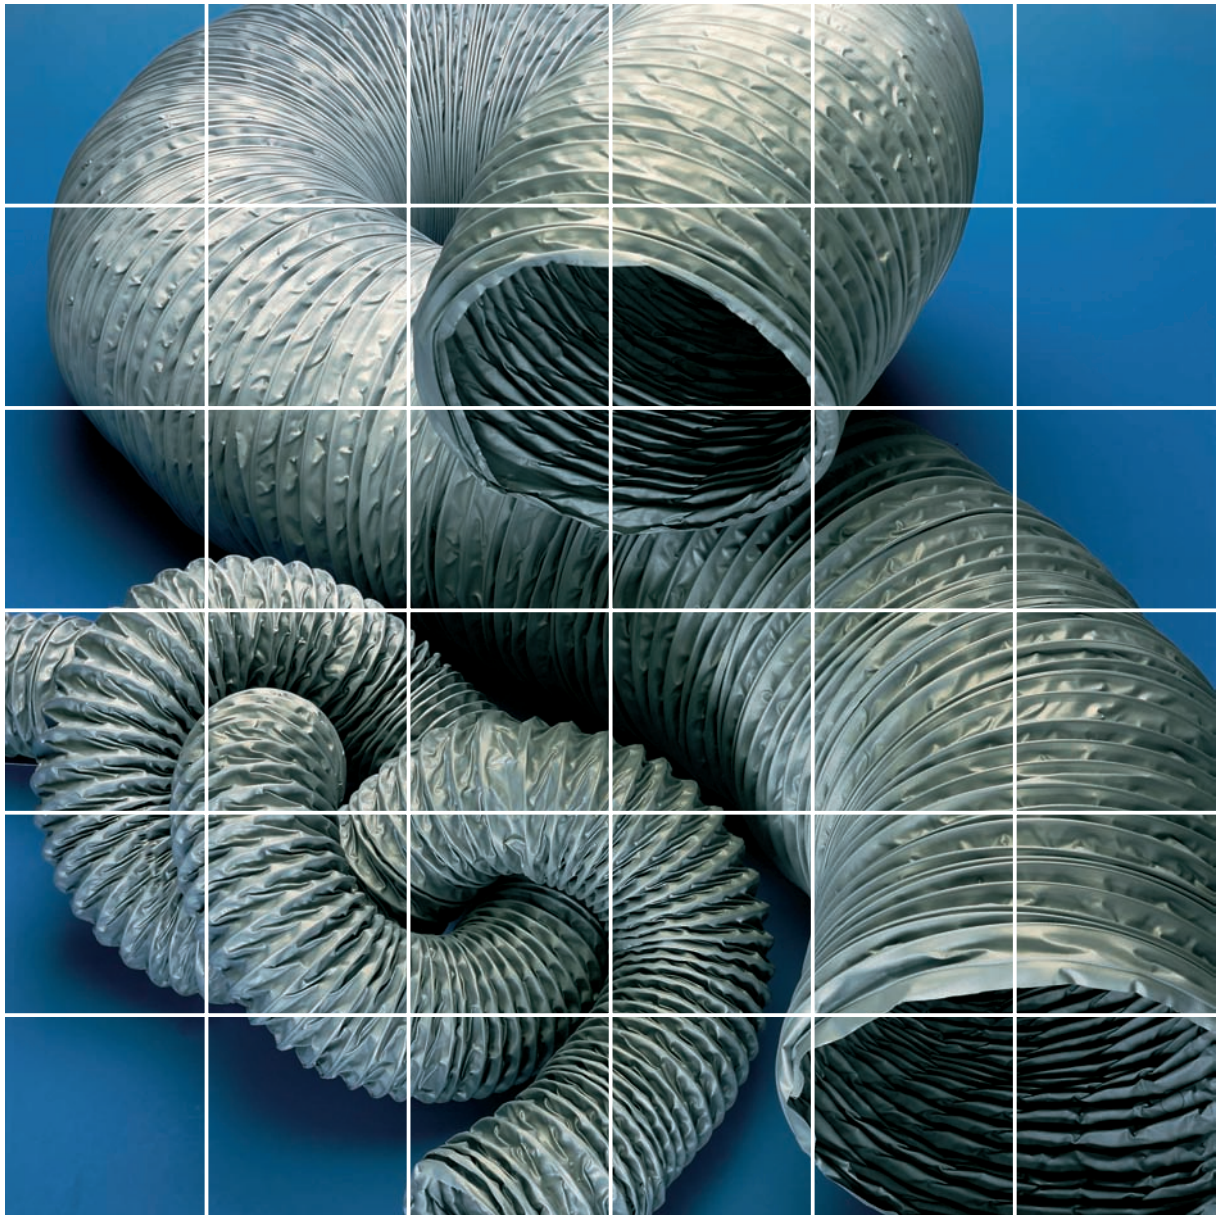

V i n y l F l e x i b l e D u c t i n g



FXV DUCTING

Application

The grey reinforced ducting is manufactured for the HVAC market and industrial purposes. It is suitable for all normal ventilation and air conditioning systems, including high pressure, and successfully withstands constant bending or flexing.

Construction

Double laminated reinforced with high density scrim.

Advantages

- Supplied in standard 6 metre length, compressed to 0.8 metre
- Individually wrapped
- Easy to connect to either round or oval ducting
- No special tools required for cutting or fixing

Technical data

Diameter range (mm)	80-610
Temperature range °C	-10/+75
Maximum air velocity	30m/sec
Max. positive working pressure	3000pa
Standard length	6 metre
Packing	Individually wrapped in 0.8 metre
Clamping	Lightning Band, Stainless Steel Clamps, Nylon Clamps and Quick Release Clamps