




Four Way Diffuser (FWD)

Finish Standard: Polyester powder coat or enamel to BS and RAL colours.

Fixings Standard: Direct through diffuser neck into ductwork.

Dampers Optional; Operated after core removal through diffuser neck.

Borders Standard: 30mm for surface mounting or tile replacer.

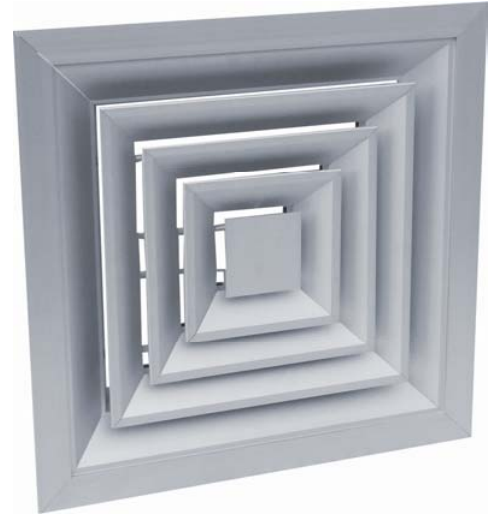

Aluminium multi-cone diffusers have been designed to meet a wide range of modern applications.

The diffusers are available in a choice of 1, 2, 3 or 4 way air diffusion patterns (4 way as standard) with 14 different core patterns available, to suit the most complex systems. The inner cores are spring loaded to enable easy removal for installation and cleaning.

All diffusers are supplied with brass wire safety cords.

