

**NATIONAL
VENTILATION**

Manufacturers & suppliers
of  **monsoon** products

UMD Series

Domestic mixed flow fan



- High performance and fully speed controllable
- Motor equipped with Standard Thermal Overload Protection, IPX4 voltage 220-240V 50Hz
- Two speed motor with option of overrun timer (2 to 30 minutes)
- Quick release motor for easy mounting and maintenance

Call now to find out more: 01823 690 290




www.nationalventilation.co.uk Email: info@nvagroup.co.uk

The UMD Domestic range can be used for exhaust and supply ventilation systems that require high pressure, powerful airflow and low noise levels. With a range of sizes from 100-150mm, larger commercial models are available. The UMD range can be used with rigid and flexible ducting, and are the ideal solution for air exhaust systems for rooms with high humidity such as bathrooms and kitchens.

Models available

CODE	DESCRIPTION
UMD100	100mm Standard In-line Fan (187m ³ /h)
UMD100T	100mm Timer In-line Fan (187m ³ /hr)
UMD125	125mm Standard In-line Fan (280m ³ /h)
UMD125T	125mm Timer In-line Fan (280m ³ /h)
UMD150	150mm Standard In-line Fan (552m ³ /h)
UMD150T	150mm Timer In-line Fan (552m ³ /h)

Performance

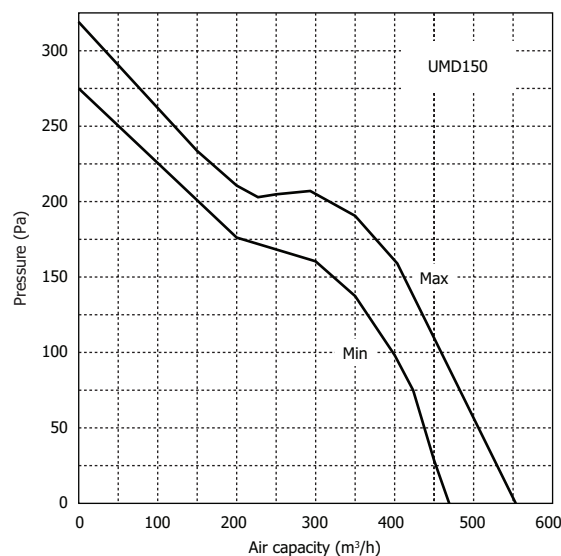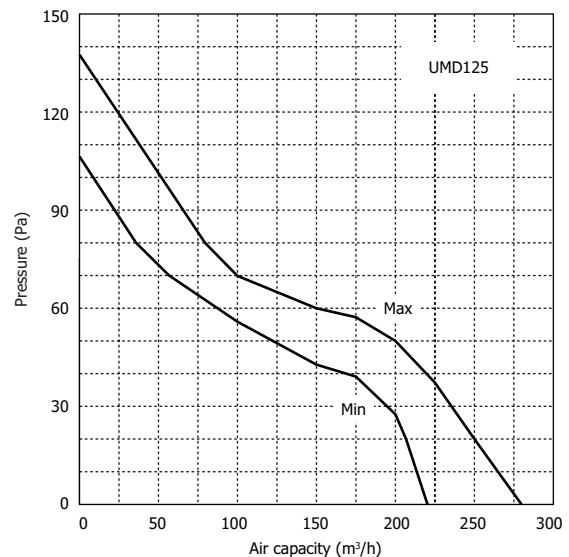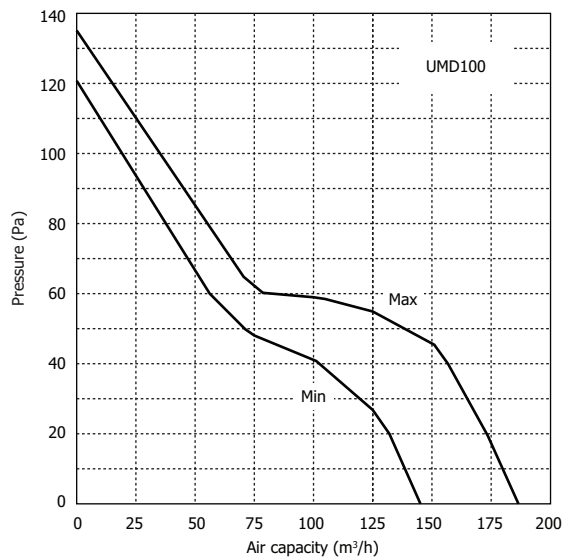

Call now to find out more: 01823 690 290


www.nationalventilation.co.uk Email: info@nvagroup.co.uk

Technical data

	UMD100		UMD125		UMD150	
	HIGH	LOW	HIGH	LOW	HIGH	LOW
Power (W)	33	21	37	23	60	30
Current (A)	0.2	0.12	0.26	0.19	0.27	0.17
Maximum air flow (m ³ /h)	187	145	280	220	552	467
Sound @ 3m dB(A)	35	28	36	29	44	33
Rotation speed (min ⁻¹)	2500	2450	2500	1960	2450	1670

Dimensions (mm)

MODEL	H	B	L	ØD
UMD100	190	246	140	96
UMD125	190	246	140	123
UMD150	250	295	195	146

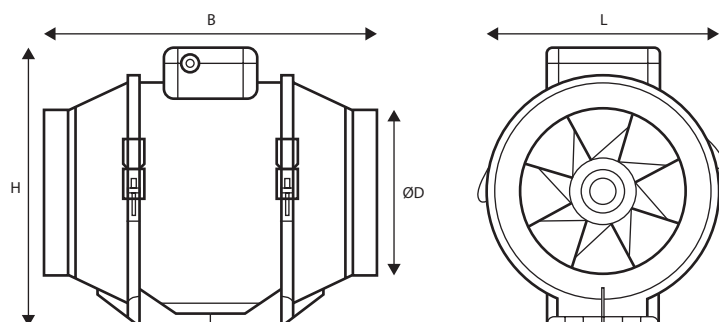

Call now to find out more: 01823 690 290

www.nationalventilation.co.uk Email: info@nvagroup.co.uk