

ACR35

- Trickle & boost speeds adjustable
- Humidity sensor, adjustable
- Timer adjustable
- Available in 240V & 12V SELV
- Data logger, hours on trickle and boost, hours boosted by humidity and energy consumption as standard
- 7 year warranty
- IPX5 (IPX7 SELV)



CODE	DESCRIPTION
ACR35	Continuous running HTP fan
ACR35-SELV	Low voltage continuous running HTP fan
ACR35CV	Continuous running HTP fan with constant volume
ACR35CV-SELV	Low voltage continuous running HTP fan with constant voltage
MONDMEVWK	100mm Window Kit 97m ³ /h

The ACR35 & ACR35 low Voltage continuous running HTP fan designed for kitchens, utilities and bathrooms. Adjustable trickle speeds between 5-30l/s with a maximum boost of 35l/s. Comes with intermittent to continuous running options, a data logger incorporating 3 digit settings lock, hours on trickle and boost, hours boosted on humidity and energy consumption as standard. The HTP fan has an adjustable dynamic ambient response humidity sensor and an adjustable timer between 1 - 30 minutes. The in built boost can be activated by pullcord, humidity sensor, switched live or a remote button.

Fan Technical data

FAN MOTOR	EXTRACT CAPACITY	TRICKLE dB(A) @ 3M	IP RATING
1W on trickle, 8.3W on boost	Trickle	14	IPX5


Performance data

TRICKLE LOW	TRICKLE HIGH	BOOST
5l/s	15l/s	35l/s

Hole diameters (mm):

WALLS	CEILING	WINDOWS
107	107	117

Performance

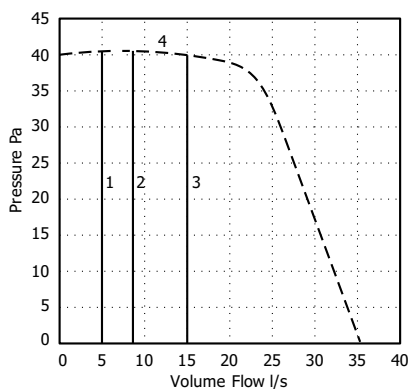

- 5l/s Constant Volume
- 9l/s Constant Volume
- 15l/s Constant Volume
- Maximum pressure available to deliver airflow

Dimensions (mm)

