


## Monsoon Radon Mitigation Fans

- Non-corrosive, IP65 rated
- Low noise and easy to install
- Ball bearing motor with thermal protection



CODE	DESCRIPTION
UT150/SC	150mm Radon Mitigation Fan White
UT150/SC-BLK	150mm Radon Mitigation Fan Black

### Dimensions (mm)



Ød	ØD	C	A	B
150	300	286	30	30

## Monsoon Medium Duty Plate Fans

- Fan casing and impeller are made from steel with polymeric coating
- Asynchronous ball bearing motor for long service life
- External rotor motor with built-in thermal protection
- Motor protection rating IP44
- Fully speed controllable
- Inlet steel finger guard as standard
- Other sizes available on request





CODE	DESCRIPTION
PMF200/4/1	200mm (860m <sup>3</sup> /h) Single Phase
PMF250/4/1	250mm (1,050m <sup>3</sup> /h) Single Phase
PMF300/4/1	300mm (1,340m <sup>3</sup> /h) Single Phase
PMF350/4/1	350mm (2,500m <sup>3</sup> /h) Single Phase
PMF400/4/1	400mm (3,580m <sup>3</sup> /h) Single Phase
PMF450/4/1	450mm (4,680m <sup>3</sup> /h) Single Phase
PMF500/4/1	500mm (7,060m <sup>3</sup> /h) Single Phase
PMF630/4/1	630mm (11,900m <sup>3</sup> /h) Single Phase

# Group B - Monsoon Commercial & Industrial Products


## Technical data

CODE	SUPPLY VOLTAGE	CURRENT (A)	POWER (W)	MAX. VOLUME (M3/H)	RPM (MIN-1)	SOUND @ 3M DB(A)	AIR STREAM TEMP (°C)	IP RATING	(KG)
PMF200/2/1	230	0.26	55	860	2300	50	30	IP24	3.9
PMF250/4/1	230	0.22	50	800	1380	55	30	IP24	4.1
PMF300/4/1	230	0.35	75	1340	1350	58	30	IP24	5.1
PMF350/4/1	230	0.65	140	2500	1380	62	30	IP24	7.1
PMF400/4/1	230	0.82	180	3580	1380	63	30	IP24	8.8
PMF450/4/1	230	1.2	250	4680	1350	64	30	IP24	10.6
PMF500/4/1	230	1.95	420	7060	1300	69	30	IP24	14.2
PMF550/4/1	230	2.55	550	8800	1300	70	30	IP24	16.6
PMF630/4/1	230	3.5	750	11900	1360	75	30	IP24	22.6

## Performance

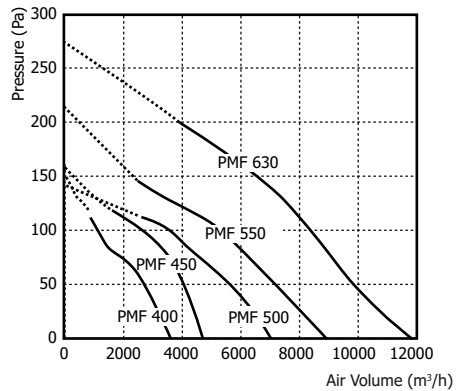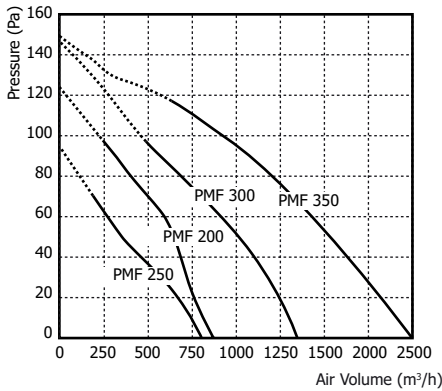

## Dimensions (mm)



MODEL	PMF 200	PMF 250	PMF 300	PMF 350	PMF 400	PMF 450	PMF 500	PMF 550	PMF 630
Ø D	210	260	326	388	417	465	520	570	650
Ø D	7	7	9	9	9	11	11	11	11
B	312	370	430	485	540	576	655	725	800
B1	260	320	380	435	490	535	615	675	710
L	145	155	155	200	240	250	260	280	295